

INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH




Minimum de largeur utile : 85 mm pour toutes les distances
 Les valeurs de réglage s'appliquent à des portes sans rayon de R 5.

Distance Epaisseur de porte

Distance	85	100	117	135	150	165	180	200	220	240	255
0	2,0	2,7	3,2	3,8	4,2	4,5	4,8	5,2	5,5	5,8	6,2
5	2,0	2,7	3,2	3,8	4,2	4,5	4,8	5,2	5,5	5,8	6,2
10	2,0	2,7	3,2	3,8	4,2	4,5	4,8	5,2	5,5	5,8	6,2
15	2,0	2,7	3,2	3,8	4,2	4,5	4,8	5,2	5,5	5,8	6,2
20	2,0	2,7	3,2	3,8	4,2	4,5	4,8	5,2	5,5	5,8	6,2

Minimum de largeur utile
 Epaisseur de porte T
 Distance T
 et toutes distances B

Distance	10	15
10,0	100,0	9,0
15,0	105,0	14,0
16,0	106,0	15,0



<https://www.qama.fr/intermat-9943-push-to-open-t-42-p28024>




Tel : 02 43 13 49 49

Fax : 02 43 30 26 16

www.qama.fr

INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

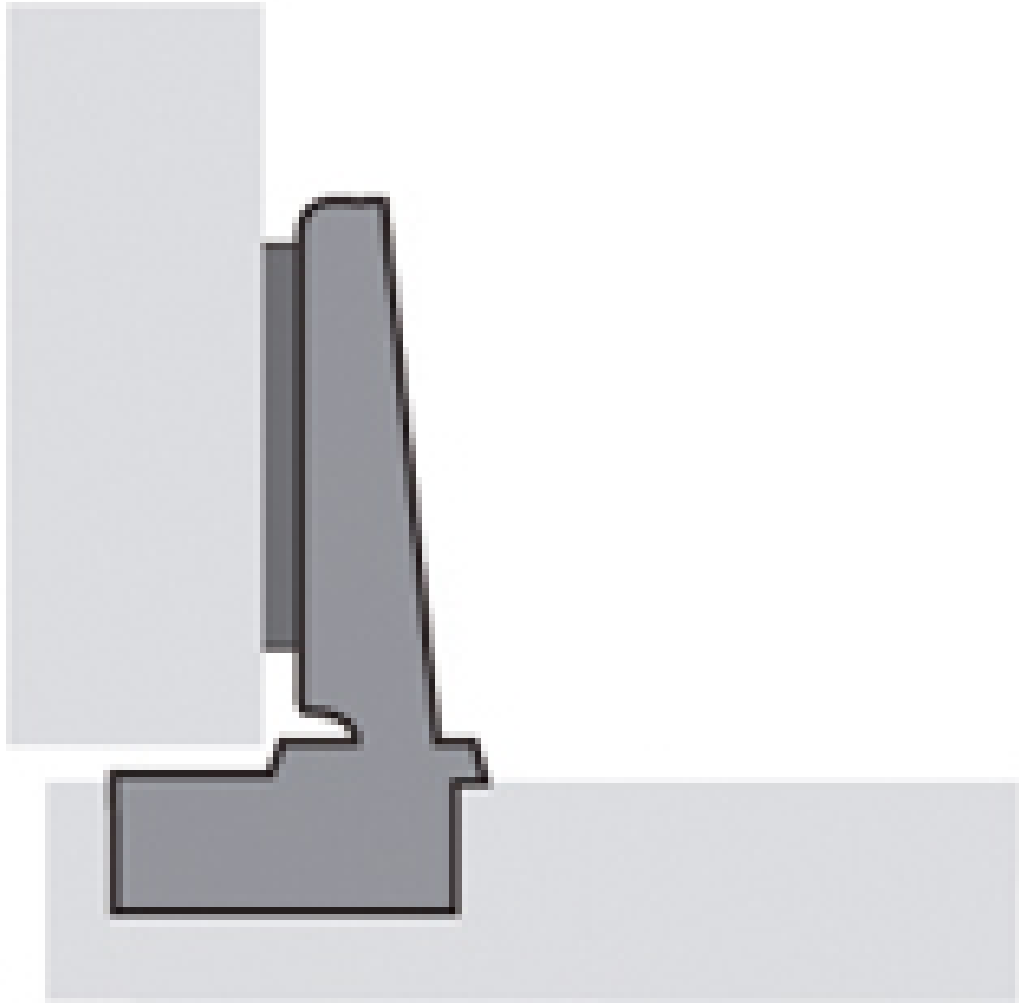

<https://www.qama.fr/intermat-9943-push-to-open-t-42-p28024>




Tel : 02 43 13 49 49

Fax : 02 43 30 26 16

www.qama.fr

INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

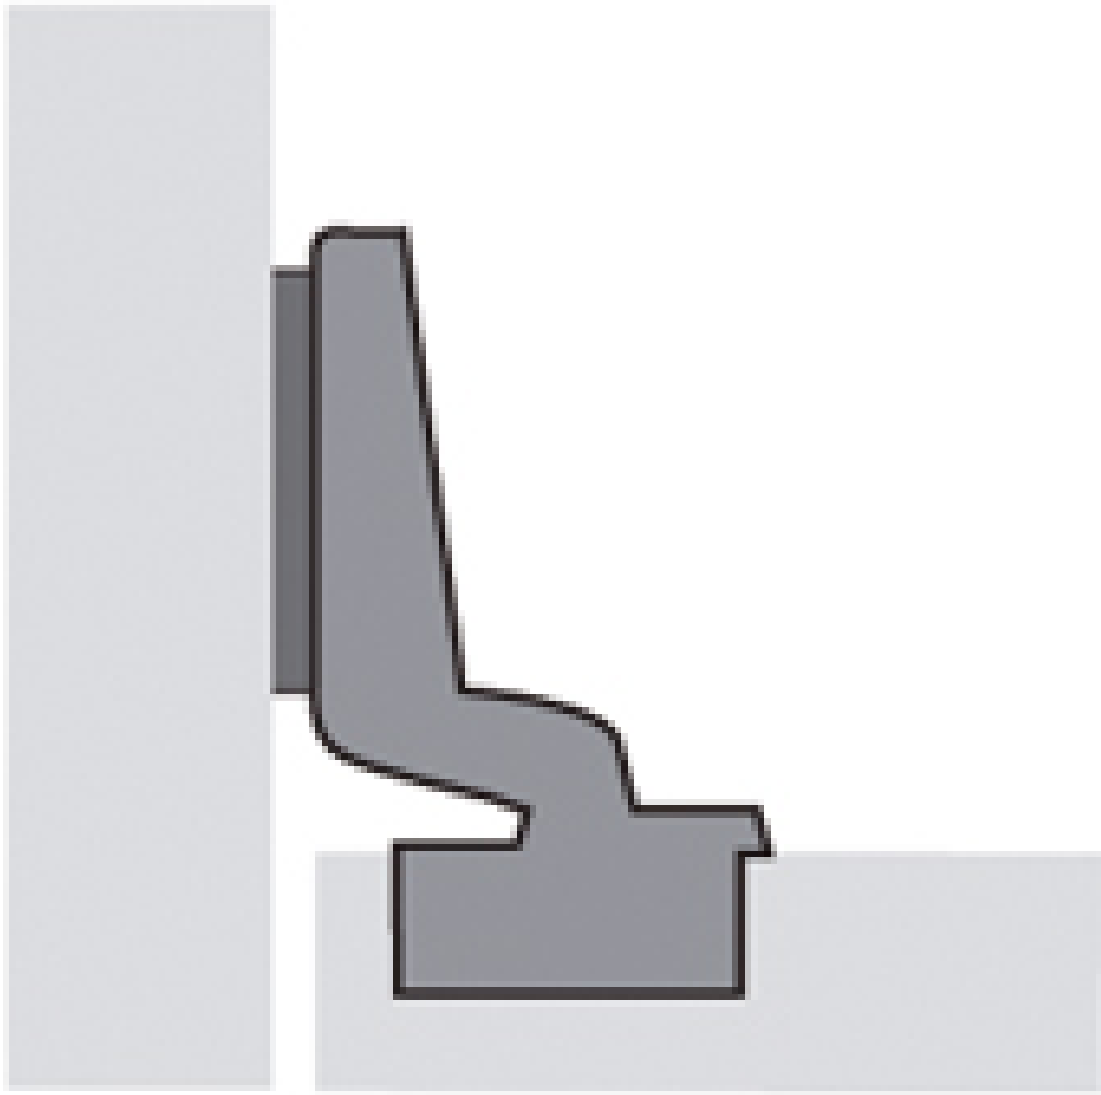

<https://www.qama.fr/intermat-9943-push-to-open-t-42-p28024>




Tel : 02 43 13 49 49

Fax : 02 43 30 26 16

www.qama.fr

INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

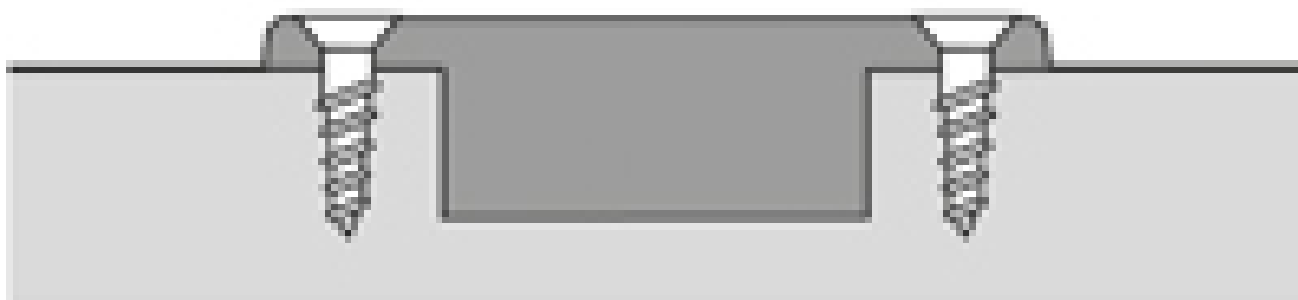

<https://www.qama.fr/intermat-9943-push-to-open-t-42-p28024>




Tel : 02 43 13 49 49

Fax : 02 43 30 26 16

www.qama.fr

INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

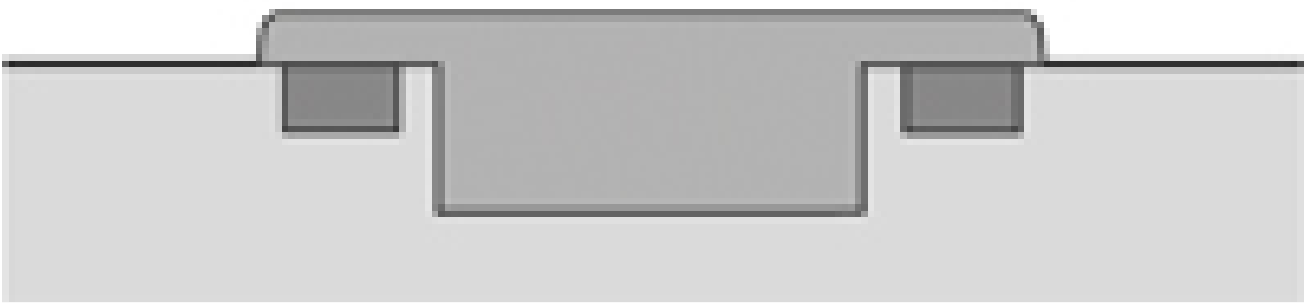

<https://www.qama.fr/intermat-9943-push-to-open-t-42-p28024>



Tel : 02 43 13 49 49

Fax : 02 43 30 26 16

www.qama.fr